

3" TROLL BALL

A fluid-driven unit offering improved cleaning over traditional static spray balls. The Troll Ball offers four different spray patterns and is suitable for CIP or portable installation.


- 316 stainless steel construction.
- Food-grade approved materials.

SPECS

- Minimum Opening: 3"/76 mm
- PSI / Bar: 50-200 / 3.5-13.8
- GPM / LPM: 30-76 / 114-288
- Cleaning Radius: 12'
- Pipe Connections: 1-1/2" Female NPT
- Maximum Operating Temperature: 250°F
- Nominal Head Rotation Speed: 3 to 15 RPM
- Length: 7"
- Weight: 4 lbs., 9 Ounces



NOMINAL PRESSURE FLOW CURVES

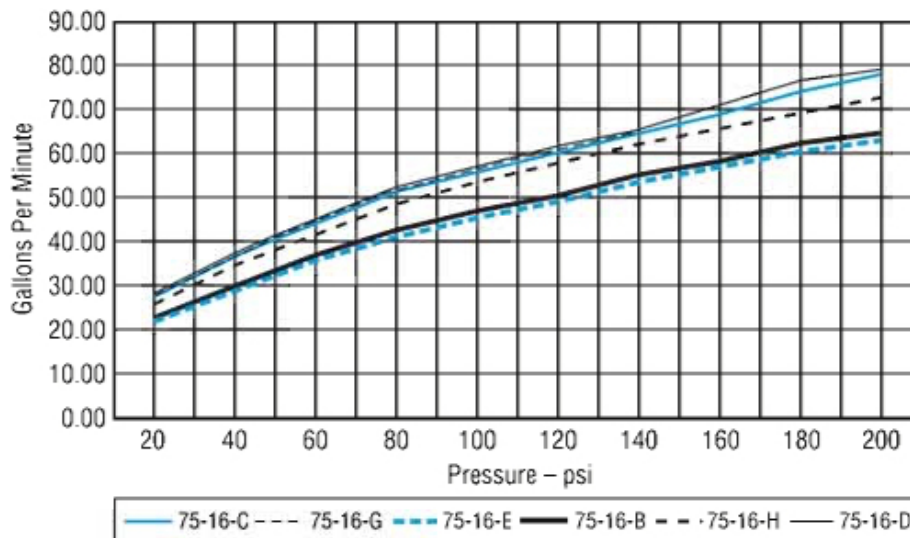

IMPACT PATTERNS

